


This is a telescoping tow bar, so its easy to hook up. It is rated at 5,000 lbs. and has a pressure release latch developing about 14:1 leverage, so its easy to unhook.

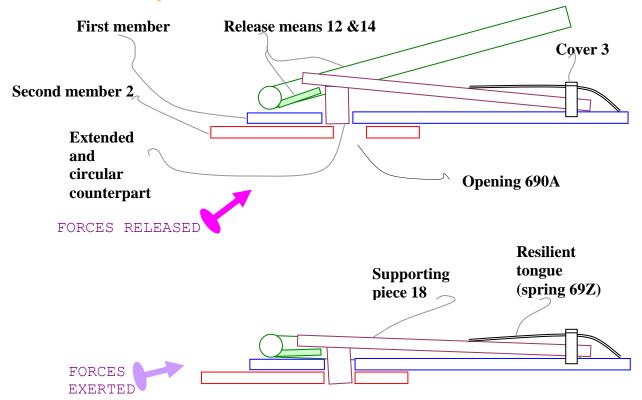

How it works: The pin supporting piece 20, "floats" on the outer square tube (first member 1). A cover 3, about 6" long, is a U shaped piece; it goes over the resilient tongue, which is a leaf spring. It also goes over the supporting piece, and makes it look good, and limits pin movement. Pry rod 22 & plate 3 pry the pin out.

You back up first, and then release the pressure with the exclusive high leverage release system.